



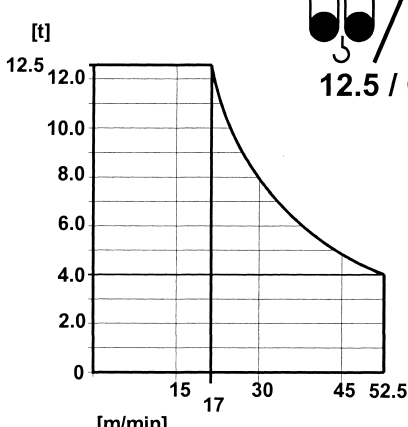
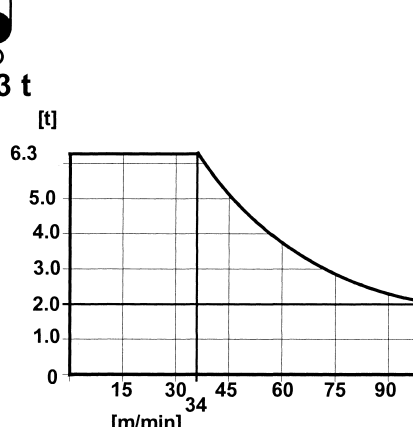










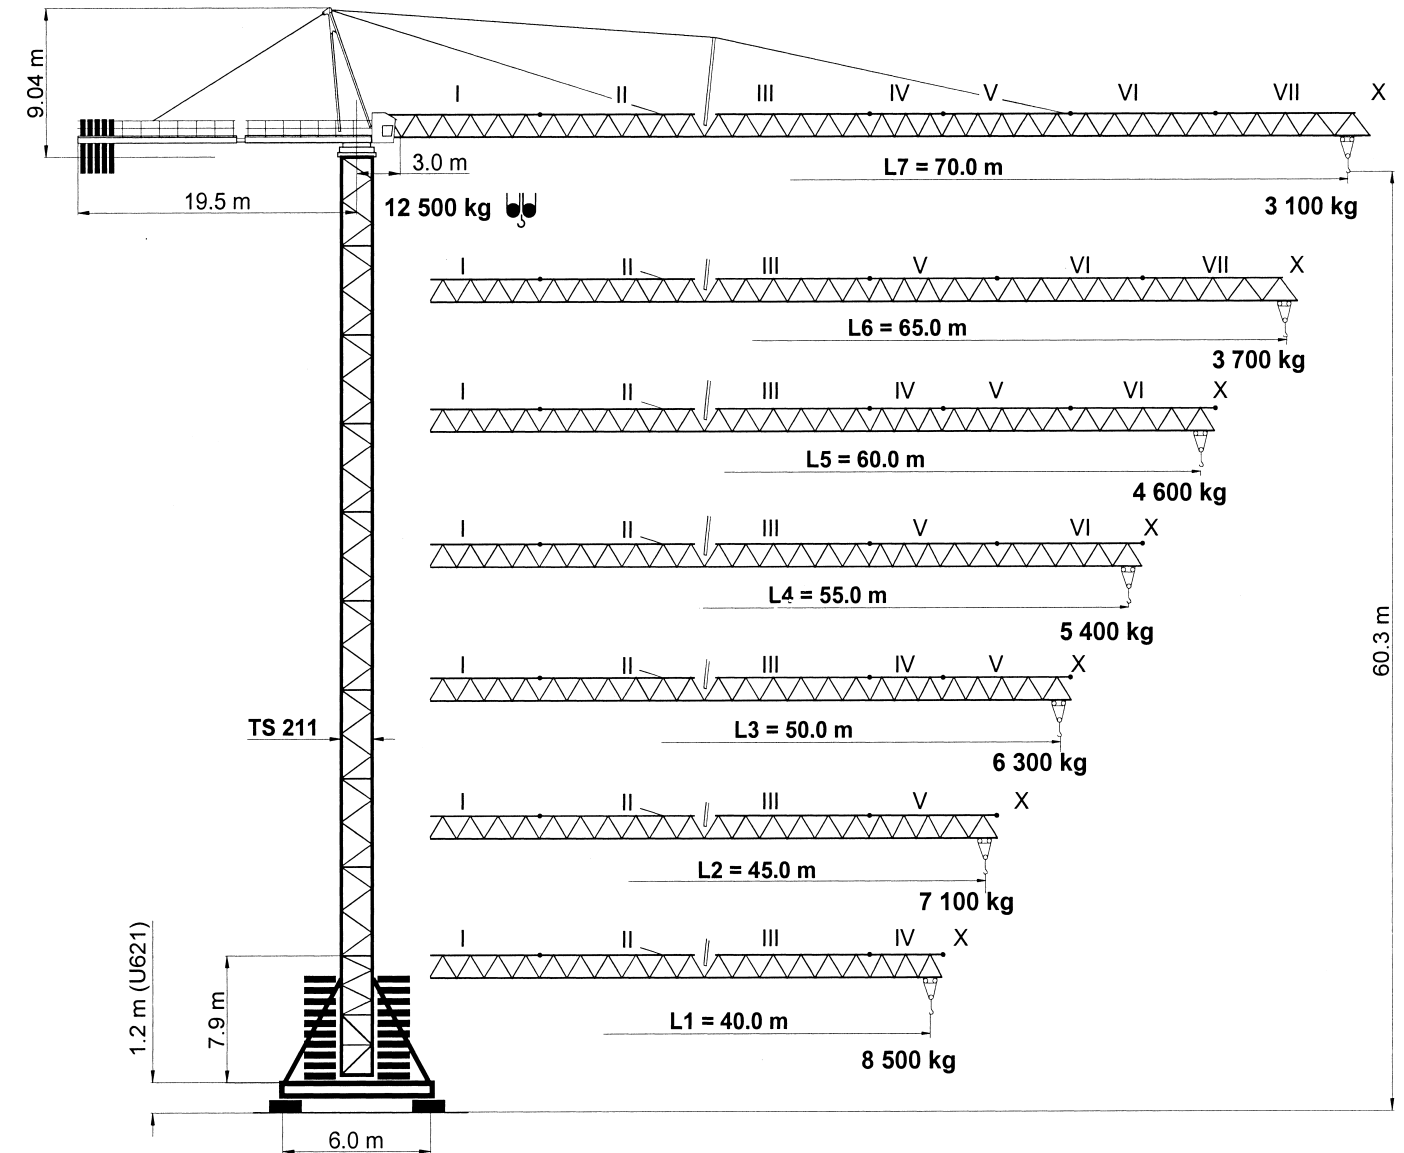


**Geschwindigkeiten • Speeds • Vitesses**

FU 8-160/4		$v = 0 \rightarrow 80 \text{ m / min.}$	7.5 kW	400 V 50 Hz 3 Ph
SR 10-190/3		$v = 0 \rightarrow 25 \text{ m / min.}$	2 x 10.0 kW	
K WB 120/4		$v = 0 \rightarrow 0.75 \text{ min}^{-1}$	2 x 120 Nm	
 <b>HK max. = 215 m</b> 6 - Lagen / 6 - layers / 6 - couches				
Type FU 45-63/5 45.0 kW			<b>Motorenleistung ges.</b> Total motor output Puissance moteur (ohne/without/sans SR 10-190/3) ~ 70 kW	<b>Anschlussleistung</b> Connected power Puissance installée 120 kVA
				
 <b>HK max. = 215 m</b> 6 - Lagen / 6 - layers / 6 - couches				
Type SR WB 66-63/4F 66.0 kW		 $\rightarrow 112 \text{ m / min}$ 2 500 kg	 $\rightarrow 56 \text{ m / min}$ 5 000 kg	<b>Motorenleistung ges.</b> Total motor output Puissance moteur (ohne/without/sans SR 10-190/3) ~ 90 kW
		 $\rightarrow 70 \text{ m / min}$ 4 200 kg	 $\rightarrow 35 \text{ m / min}$ 8 400 kg	
		 $\rightarrow 45 \text{ m / min}$	 $\rightarrow 23 \text{ m / min}$	
		 $\rightarrow 28 \text{ m / min}$ 6 300 kg	 $\rightarrow 14 \text{ m / min}$ 12 500 kg	
		<b>Anschlussleistung</b> Connected power Puissance installée 180 kVA		



Unsere Vertretung:  
Our representative:  
Notre représentant:

**PROSCHWITZ**  
B A U M A S C H I N E N

**TEREX**  Germany GmbH & Co. KG

Werk Trier · Peiner  
Gottbillstraße 1-7 · D-54294 Trier  
Telefon: ++49 (6 51) 81 00 8 - 0  
Telefax: ++49 (6 51) 8 93 00 u. 8 76 40  
internet: <http://www.terex-peiner.de>  
e-mail: [info@terex-peiner.de](mailto:info@terex-peiner.de)




DIN / FEM

*simple, available and cost effective™*

Max. Tragfähigkeit  
Lifting capacity  
Force de levage

12.5 t  


**Turmversionen • Tower versions • Versions de tours**

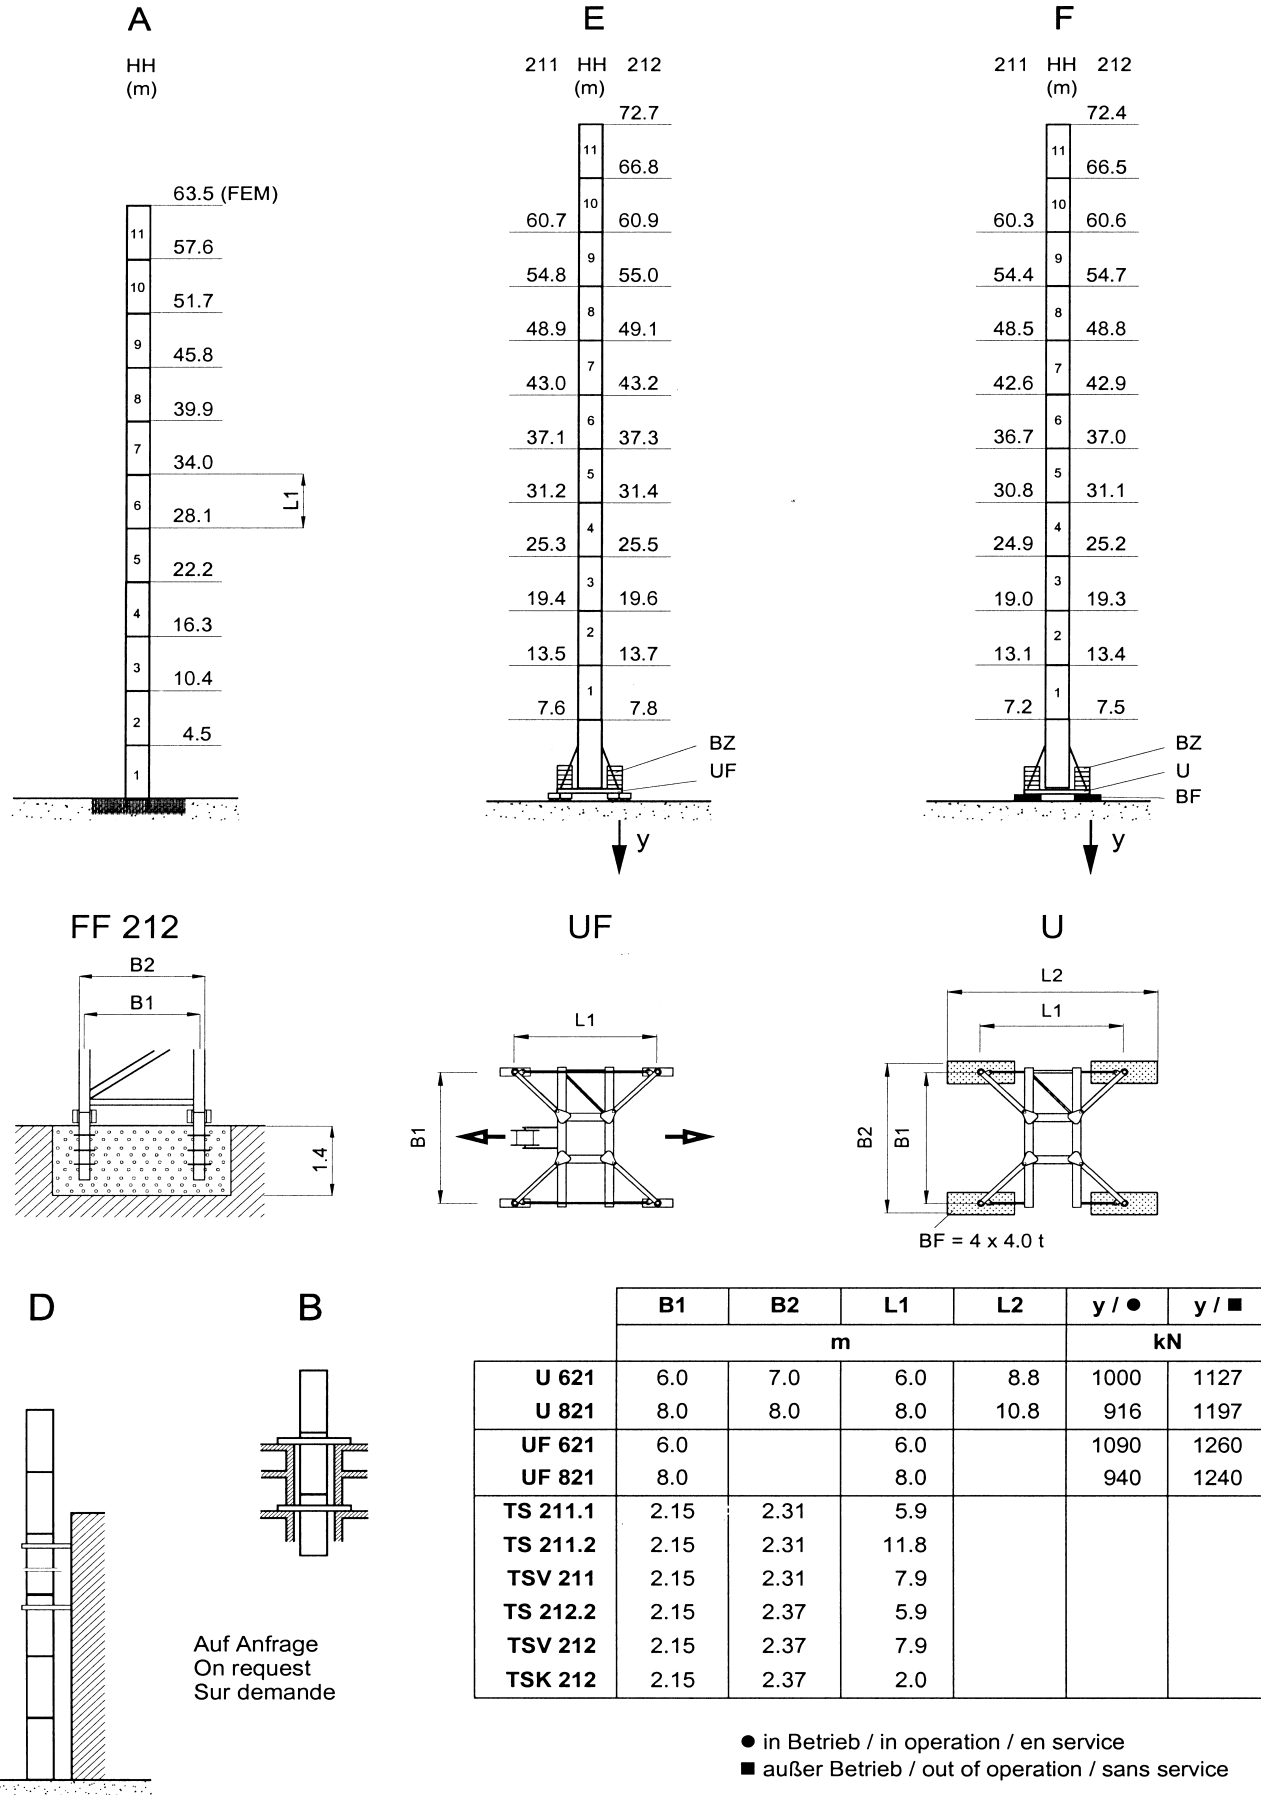

**Ausladung und Tragfähigkeit • Radius and capacity • Portée et charge**

Ausleger Jib Flèche	Max. Tragfähigkeit Max. Capacity Charge max.	Ausladung (m) und Tragfähigkeit (t) Radius (m) and capacity (t) Portée (m) et charge (t)																	
		m	12.5 t	23	25	30	35	40	43	45	48	50	53	55	58	60	63	65	68
<b>L7 70.0</b>	<b>3.0 - 20.5 m</b>	10.91	9.95	8.21	6.96	6.19	5.68	5.38	4.98	4.74	4.41	4.22	3.95	3.78	3.55	3.41	3.22	3.10	
<b>L6 65.0</b>	<b>3.0 - 21.8 m</b>	11.73	10.70	8.85	7.50	6.49	6.12	5.80	5.37	5.11	4.77	4.56	4.27	4.09	3.85	3.70			
<b>L5 60.0</b>	<b>3.0 - 24.0 m</b>	12.50	11.92	9.87	8.39	7.26	6.71	6.38	6.01	5.73	5.34	5.11	4.79	4.60					
<b>L4 55.0</b>	<b>3.0 - 25.2 m</b>	12.50	12.50	10.43	8.87	7.69	7.11	6.76	6.30	6.05	5.64	5.40							
<b>L3 50.0</b>	<b>3.0 - 26.3 m</b>	12.50	12.50	10.90	9.28	8.04	7.44	7.08	6.59	6.30									
<b>L2 45.0</b>	<b>3.0 - 26.4 m</b>	12.50	12.50	10.94	9.30	8.07	7.46	7.10											
<b>L1 40.0</b>	<b>3.0 - 27.7 m</b>	12.50	12.50	11.50	9.80	8.50													

**Ballastierung • Ballast • Lest** ohne Klettereinrichtung / without climbing device / sans cage télescopique

**Version F – mit Zentralballast und Fundamentballast / with Central ballast block and Foundation block / avec Lest de base et Bloc de fondation – BZ + BF**

HH (m)	13.1	19.0	24.9	30.8	36.7	42.6	48.5	54.4	60.3		
<b>U 621 (t)</b>	76.0	76.0	76.0	76.0	76.0	86.0	96.0	116.0	136.0		
<b>HH (m)</b>	13.4	19.3	25.2	31.1	37.0	42.9	48.8	54.7	60.6	66.5	72.4
<b>U 821 (t)</b>	36.0	36.0	36.0	36.0	36.0	36.0	46.0	56.0	76.0	86.0	106.0

**Version E – mit Zentralballast / with Central ballast block / avec Lest de base – BZ**

HH (m)	13.5	19.4	25.3	31.2	37.1	43.0	48.9	54.8	60.7		
<b>UF 621 - DIN (t)</b>	70.0	70.0	70.0	70.0	70.0	80.0	90.0	110.0	130.0		
<b>UF 621 - FEM (t)</b>	70.0	70.0	70.0	70.0	80.0	80.0	90.0	110.0	130.0		
<b>HH (m)</b>	13.7	19.6	25.5	31.4	37.3	43.2	49.1	55.0	60.9	66.8	72.7
<b>UF 821 - DIN (t)</b>	20.0	20.0	20.0	20.0	20.0	30.0	40.0	50.0	70.0	80.0	100.0
<b>UF 821 - FEM (t)</b>	30.0	30.0	30.0	30.0	30.0	30.0	40.0	50.0	70.0	80.0	100.0

**Gegengewichtsballast • Counterweight • Contrepoids**

Ausleger / Jib / Flèche	L1	L2	L3	L4	L5	L6	L7
	13.60	14.60	16.60	17.75	19.75	18.75	20.75
<b>BG (t)</b>	3 x 3.15	2 x 3.15		3 x 3.15	1 x 3.15	2 x 3.15	
	1 x 4.15	2 x 4.15	4 x 4.15	2 x 4.15	4 x 4.15	3 x 4.15	5 x 4.15